

数码单反配件

IT'S ALL ABOUT DSLR CAMERAS



LINKSTAR(H.K.) LTD.

联星（香港）有限公司

Unit 25, 1/F, Hung Hom Square, 39 Ma Tau Wai Road,
Hung Hom, Kowloon, Hong Kong.

Phone: +852-2186 7580 Fax: +852-2186 7635

E-mail: info@linkstarhk.com

<http://www.linkstarhk.com>



Copyright 2011, Linkstar (HK) Ltd.

We reserve the rights to make any changes due to technical developments.

LL09/11

www.linkstarhk.com



LINK YOUR VISION

联星（香港）有限公司



Wired/Wireless Flash Trigger & Shutter Release

Wireless Flash Trigger & Shutter Release

LDT-2.4G 多功能无线触发器

LDT-2.4G is applied with the new anti-jamming technology and shutter timing control system, realizing many kinds of photography functions for your camera. It is compatible with most DSLR cameras and possesses a very responsive sensation which leads to unmistakable command.

LDT-2.4G 应用了新的防干扰技术和快门计时控制系统，能触发机顶闪光灯和影楼灯，为您的照相机达到各种摄影效果。它与大部份数码单反相机(DSLR)相容，并且拥有一个强大的反应系统，让您操作起来绝不会出错。



Support Model 适配的相机型号

N1

Nikon 尼康: N90S/F5/F6/F100/F90/F90X/D1/D1H/D2/D2H/D2X/D200/D300/D700/D3/
Fujifilm富士: FujiS3/FujiS5
Kodak 柯达: DSC-14N

N2

Nikon 尼康: D80/D70/D70S

N3

Nikon 尼康: D90/D3000/D3100/D5000/D7000

C1

Canon 佳能: G10/30/33/50/50D/50E/300/300V/300D/350D/400D/450D/500D/1000D
Pentax 宾得: IST-D/DS/DS2/DL/DL2/K10/K10D/K110D/K100D/K20D/K200D/
KM/Cs205/MZ-6/MZ-L/ZX-L
Hasselblad 哈苏: H/H1/H2/H2D/H1D
Contax 康泰时: N/NI/NX/645/EIGITAL/LA-50
Samsung 三星: GX-20/GX-10/GX-1L/GX-1S

C3

Canon 佳能: D30/D50/D60/D2000/1D/1DS/1D MARK II/1D MARK II N/1DS MARK II/5D/
5D MARK II/1DS MARK III/10D/20D/30D/40D/50D/1V/1VHS3
Kodak 柯达: DSC-530

Specification

Type of control: 16 Channels, 2.4GHz
Transmitter size (L x W x H): 81x34x28mm
Receiver sizes (L x W x H): 86x35x34mm (Including hot shoe)
Battery: 2 x AAA Batteries (Transmitter & Receiver)
Battery life: Approximately 1000 times
Transmission ranges: Approximately 100 meters
Sync speed: 1/250 sec.

规格

控制类型: 16 频道, 2.4GHz
发射器体积 (长x宽x高): 81x34x28mm
接收器体积(长x阔x高): 86x35x34mm
电池: 2 x AAA 电池 (发射器 / 接收器)
电池寿命: 约1000次
发射范围: 约100米
同步速度: 1/250 sec.

Wired Timer Shutter Release

WTS

有线定时器

The WTS series is a multitasked remote switch with timer and exposure count control functions. It is very useful when applied with time lapse photography like astrophotography.

WTS系列多功能有线遥控配备了时控和曝光量控制功能，使用在间歇性拍摄法如天体照相术尤其方便。

Support Model 适配的相机型号

C1:

Pentax 宾得: K100D, K110D, K10D, *ist Ds2, *ist D, *ist Ds, *ist, *ist DL, *ist DL2
Samsung 三星: GX-1L, GX-1S, GX-10
Canon 佳能: EOS 30, 33, 50E, 300, 300V, 3000, 50, 300D (Digital Rebel), 350D (Digital Rebel XT), 400D (Digital Rebel XTi), 450D (Digital Rebel XSi), 500D, 1000D

C3:

Canon 佳能: EOS 1Ds Mark II, 1Ds Mark III, 1Ds, 1D Mark IV, 1D Mark II N, 1D Mark III, 5D Mark II, 1D, 5D, 7D, 50D, 40D, 30D, 20D, 10D, D60, D30, D2000, 1v HS, 1v, 3

E2:

Olympus 奥林巴斯 SP-510UZ, SP-550UZ, E400, E410, E510, E450, E520, E420

E3:

Olympus 奥林巴斯 E1, E3, E10, E20, E20N, E100RS, C2500L, E300 (via the HLD3 power battery holder) C8080WZ (via the B-HLD30 power battery holder), C7070WZ (via the B-HLD20 power battery holder), C5060WZ (via the B-HLD20 power battery holder)

N1:

Nikon 尼康: D2H, D2Hs, D1x, D1h, D1, D2X, D2Xs, D200, D300, D3, D3X, D3s, D2Hs, D300S, D700, F5, F6, F100, F90, F90x, D100 (MB-D100 Vertical Grip/Battery Holder needed), Kodak 柯达 DCS-14n, Fujifilm 富士 Finepix S3pro, S5pro

N2:

Nikon 尼康: D70S, D80

N3:

Nikon 尼康: D90, Nikon D5000

S1:

Sony 索尼 Alpha DSLR-A100, SLR-A200, SLR-A300, SLR-A350, SLR-A700, SLR-A900, Alpha 5D, Alpha 7D
Minolta: Maxxum/Dynax/AF 7D, 5D, 9, 7, 5, 4, 3, 807si, 800si, 700si, 600si, 505si, 500si, Sweets, 9000, 7000, 5000, Dimage 7Hi, 7i, 7, 5

P1:

Panasonic 松下 Lumix DMC FZ20, FZ20K, FZ25, FZ30, FZ50, LC1, L10, L1

Timer delay: 0s to 99hrs 59min 59s in one-second increment
时控延时: 0秒至99小时59分59秒, 逐秒递增

Exposure time: 0s to 99hrs 59min 59s in one-second increment
曝光时间: 0秒至99小时59分59秒, 逐秒递增

Interval: 1s to 99hrs 59min 59s in one-second increment
间隔: 1秒至99小时59分59秒, 逐秒递增

Number of shots: 1 to 399 times
连拍照片数: 1-399张

Power source: 2 x AAA batteries

电源: 2xAAA电池

Dimensions: 155 x 40 x 18 mm

体积: 155x40x18毫米

Weight: 105g

重量: 105g

Length of cord: 850mm

线长: 850毫米



Wired Shutter Release

WSR

快门线

The WSR series remote controller allows you to release the shutter when it is necessary to avoid camera vibration, or to trigger in a certain distance. With the elegant design as well as excellent quality, it is the best partner for all professional photographers.

WSR系列遥控让你可以在按下快门时避免震动照相机，更可以在一定距离触发照相机快门。它的外型美观高贵，品质极佳，是专业摄影师们的最佳伙伴。

Support Model 适配的相机型号

C1:

Canon 佳能
Powershot G10/EOS30/EOS33/50/50E/300/300D/300V/350D (Rebel Xti) /400D (Rebel Xti) /450D (Rebel Xti) /500D (Rebel Xti) /1000D (Rebel Xti)
Pentax 宾得: K10D/K110D/K100D/K20D/K200D/KM/Cs205/ *ist D/DS/DS2/DL/DL2/K10 / MZ-6/ MZ-L/ ZX-L
Samsung 三星: GX-1L/ GX-1S/ GX-20/ GX-10
Contax 康泰时: 645/Nl/Nx/N/Digital/LA-50 Remote Switch Shutter

C3:

Canon 佳能: EOS 1Ds Mark II /1Ds Mark III /1Ds/1D Mark IV/1D Mark II N/1D Mark III /5D Mark II /1D, 5D, 7D, 50D, 40D, 30D, 20D, 10D, D60, D30, D2000, 1v HS, 1v, 3

E2:

Olympus 奥林巴斯: SP-510UZ/SP-550UZ/E400/E410/E510/E450/E520/E420

E3:

Olympus 奥林巴斯 E1, E3, E10, E20, E20N, E100RS, C2500L, E300 (via the HLD3 power battery holder) C8080WZ (via the B-HLD30 power battery holder), C7070WZ (via the B-HLD20 power battery holder), C5060WZ (via the B-HLD20 power battery holder)

N1:

Nikon 尼康: D2H/D2Hs/D1x/D1h/D1/D2X/D2Xs/D200/D300/D3/D3X/D3s/D2Hs/D300S/D700/F5/F6/F100/F90/F90x/D100 (MB-D100 Vertical Grip/Battery Holder needed), Kodak 柯达 DCS-14n, Fujifilm 富士 Finepix S3pro/S5pro

N2:

Nikon 尼康: D70S/D80

N3:

Nikon 尼康: D90/ D5000

S1:

Sony 索尼 DSLR-A100 A200 A300 A350 A700 A900
Konica Minolta 柯尼卡美能达 Maxxum/Dynax/AF 7D/ 5D/ 9/7/5/4/3/ 807si/800si/700si/ 600si/505si/500si/ Sweet/Sweets/XTSi/HTSi Plus/ STS 9xi, 7xi, 5xi/ 9000i/7000i/9000/ 7000/5000

P1:

Panasonic 松下 Lumix DMC FZ20, FZ20K, FZ25, FZ30, FZ50, LC1, L10, L1



Dimensions 体积: 98 x 29 x 19 mm

Weight 重量: 50g

Length of cord 线长: 900mm

Wireless Timer Shutter Release

TS 无线定时器

The TS timer remote controller is a multitasked remote switch equipped with an interval timer control function which can be used wirelessly. It is especially useful when applied in time lapse photography like shootings of blooming flowers, moving clouds etc.

TS无线定时器对于间歇性拍摄法非常有帮助，它内置了间隔时控拍摄功能，能以无线形式运作。TS无线定时器对拍摄花开过程、云的飘浮等等都很方便。



Supported cameras	Nikon、Canon、Sony、Samsung、Pentax、Olympus、Konica、Minolta、Panasonic
Timer delay	0s to 99hrs 59min 59s in one-second increments
Exposure time	0s to 99hrs 59min 59s in one-second increments
Interval	1s to 99hrs 59min 59s in one-second increments
Number of shots	1 to 399,-- (unlimited)
Power source	JY-710TX: AAA 1.5V LR03 battery; JY-710RX: CR2 3.0V Lithium battery
Battery life	JY-710TX can work for about 20,000 times; JY-710RX can standby time for about 45 hours.
Operating temperture	-20 to +50 C(-4-+122 F)
Type	FSK 2.4GHz wireless remote control system
Distance	≤100m
Channels	16
Dimensions	155x40x18mm & 50X40X30mm

规格

时控延时: 0秒至99小时59分59秒, 逐秒递增
曝光时间: 0秒至99小时59分59秒, 逐秒递增
间隔: 1秒至99小时59分59秒, 逐秒递增
连拍照片量: 1-399张 (无限)
电源: JY-710TX: AAA 1.5V LR03电池 / JY-710RX: CR2 3.0V锂电池
电池寿命: JY-710TX: 约20,000次 / JY-710RX: 待命时间长约45小时
运行温度: 摄氏 -20 至 +50度 (华氏 -4 至 +122度)
类型: FSK 2.4GHz 无线遥控系统
工作范围: 100米
频道: 16个
体积: 155 x 40 x 18mm & 50 x 40 x 30mm



Support Model 适配的相机型号

- C1.** Pentax宾得: K100D, K110D, K10D, *ist Ds2, *ist D, *ist Ds, *ist, *ist DL, *ist DL2
Samsung三星: GX-1L, GX-1S, GX-10
Canon佳能: EOS 30,33,50E,300,300V,3000,50,300D(Digital Rebel), 350D(Digital Rebel XT),400D(Digital Rebel XTi), 450D(Digital Rebel XSi), 500D,1000Dvv
- C3.** Canon佳能: EOS 1Ds Mark II/1Ds Mark III/1Ds/1D Mark IV/1D Mark II N/1D Mark III/5D Mark II/1D,5D,7D, 50D,40D,30D,20D,10D,D60, D30,D2000,1v HS, 1v, 3
- E2.** Olympus 奥林巴斯:SP-510UZ/SP-550UZ/E400/E410/E510/E450/E520/E420
- E3.** Olympus 奥林巴斯E1,E3,E10,E20,E20N,E100RS,C2500L,E300(via the HLD3 power battery holder) C8080WZ(Via the B-HLD30 power battery holder), C7070WZ (via the B-HLD20 power battery holder), C5060WZ(via the B-HLD20 power battery holder)
- N1.** Nikon尼康:D2H/D2Hs/D1x/D1h/D1/D2X/D2Xs/D200/D300/D3/D3X/D3s/D2Hs/D300S/D700/F5/F6/F100/F90/F90x/D100(MB-D100 Vertical Grip/Battery Holder needed)
Kodak柯达: DCS-14n
Fujifilm富士: Finepix S3pro/S5pro
- N2.** Nikon 尼康: D70S/D80
- N3.** Nikon 尼康: D90/ D5000
- S1.** Sony 索尼: DSLR-A100 A200 A300 A350 A700 A900
KonicaMinolta柯尼卡美能达 Maxxum/Dynax/AF 7D/ 5D/ 9/7/5/4/3/ 807si/800si,/700si/ 600si,/505si,/500si/ Sweet,/Sweets/XTSi/HTSi Plus/ STS 9xi, 7xi, 5xi/ 9000i/7000i/9000/ 7000,/5000
- P1.** Panasonic 松下: Lumix DMC FZ20, FZ20K, FZ25, FZ30, FZ50, LC1, L10, L1

Wireless Remote Control Shutter Release

SR 无线快门线

The SR series is produced with the latest anti-jamming technology so there will not be any complaints when you pull the trigger.

SR系列应用了最新的防干扰技术，在按下触发器时您绝对会感到很满意。



Control formation	16 Channels, 433MHz
Transmitter size	80 x 25 x 18mm
Receiver size	50 x 40 x 30mm (Including hot shoe)
Battery	Transmitter (23AE 12V), Receiver (CR2 3.0V)
Battery life	Approximately 1000 times
Transmitting distance	Approximately 100 meters
Weight	80g (Including the battery)

规格

控制类型: 16 频道, 433MHz
发射器体积 (长x宽x高): 80 x 25 x 18mm
接收器体积 (长x阔x高): 50 x 40 x 30 mm (连热靴)
电池: 发射器: 23AE 12V, 接收器: CR2 3.0V
电池寿命: 约1000次
发射范围: 约100米
重量: 80克(连电池)

Support Model 适配的相机型号

- C1.**
Canon 佳能: Powershot G10/EOS30/EOS33/50/50E/300/300D/300V/350D(RebelXti)/400D(RebelXti)/450D(RebelXti)/500D(Rebel Xti)/1000D(Rebel Xti)
Pentax 宾得: K10D/K110D/K100D/K20D/K200D/KM/Cs205/ *ist D/DS/DS2/DL/DL2/K10 / MZ-6/ MZ-L/ ZX-L
Samsung 三星: GX-1L/ GX-1S/ GX-20/ GX-10
Contax 康泰时: 645/Nl/Nx/N/Digital/LA-50 Remote Switch Shutter
- C3.**
Canon 佳能: EOS 1Ds Mark II/1Ds Mark III/1Ds/1D Mark IV/1D Mark II
N/1D Mark III/5D Mark II/1D,5D,7D, 50D,40D,30D,20D,10D,D60,
D30,D2000,1v HS, 1v, 3
- E2.**
Olympus 奥林巴斯: SP-510UZ/SP-550UZ/E400/E410/E510/E450/E520/E420
- E3.**
Olympus 奥林巴斯: E1,E3,E10,E20,E20N,E100RS,C2500L,E300(via the HLD3 power battery holder) C8080WZ(Via the B-HLD30 power battery holder), C7070WZ (via the B-HLD20 power battery holder), C5060WZ(via the B-HLD20 power battery holder)
- N1.**
Nikon 尼康: D2H/D2Hs/D1x/D1h/D1/D2X/D2Xs/D200/D300/D3/D3X/ D3s/D2Hs/D300S/D700/F5/F6/F100/F90/F90x/D100(MB-D100 Vertical Grip/Battery Holder needed),
Kodak 柯达: DCS-14n, Fujifilm 富士: Finepix S3pro/S5pro
- N2.** Nikon 尼康: D70S/D80
N3. Nikon 尼康: D90/ D5000
- S1.**
Sony 索尼 DSLR-A100 A200 A300 A350 A700 A900
KonicaMinolta Maxxum/Dynax/AF 7D/ 5D/ 9/7/5/4/3/ 807si/800si,/700si/ 600si,/505si,/500si/ Sweet,/Sweets/XTSi/HTSi
Plus/ STS 9xi, 7xi, 5xi/ 9000i/7000i/9000/ 7000,/5000
- P1.**
Panasonic 松下 Lumix DMC FZ20, FZ20K, FZ25, FZ30, FZ50, LC1, L10, L1

Remote Control

IRC-U 通用型红外线遥控器

The IRC-U remote control is built for all DSLR cameras. Its working distance is up to 15 meters. It is mini in size and light in weight. You will be pleased to carry it with you traveling around the world.

IRC-U红外线遥控器应用于任何数码单反相机(DSLR)。它的工作距离远至15米，而且体型小，重量轻，很适合随身携带到世界各地进行拍摄。

Support Model

适配的相机型号

Nikon 尼康

D90,D80, D70S, D70, D50,D3000,D5000, 8400, 8800, Pronea S, F75, F65, F55, N65, N75, Nuvis S, Lite Touch

Canon 佳能

EOS 450D(Rebel XSi), EOS 400D(Rebel XT), EOS 350D(Rebel XT), EOS 300D, EOS 30/33/30V, EOS 50/55, EOS kissIII, EOS kissIII, EOS 100, EOS 10, EOS 300V, EOS 300X, 300VQD, EOS IX, IXUS jr/II/III, SURESHOT, SURESHOT, ELAN7, Rebel T1 Date, Rebel T2 Date, Z180u, Z155, 120, 370Z, 370Z,

Pentax 宾得

*istDS2, *istDS, *istDL2, *istDL, *istD, K100D, K110D, K200D, K10D,K20D,K-M,K-7 Optio S6/S60, Optio S5z/S5n/S5i, Optio S4i/S4, Optio SV/SVi, Optio 550/555, Optio 750z, Optio 330/430[rs], *ist, MZ-6

Konica/Minolta 柯尼卡/美能达

DiMAGE F100, DiMAGE F200, DiMAGE F300,



BATTERY PACK FOR FLASH GUN

DCBP-1 机顶灯快速充电盒



The DCBP-1 is an external battery pack for your flash gun; it is operated with 6 x AA batteries. The DCBP-1 significantly reduces the recycling time for your external flash gun, and therefore it is very suitable for continuously flashing. There're different connecting plugs for different model of flashes.

DCBP-1 是外置型机顶快速充电盒，操作只需6颗AA电池。DCBP-1能大大减少外置机顶闪光灯的回电时间，使摄影时能不断地使用闪光。使用於不同品牌型号的闪光灯可以配合各种的连接线插头。



6 x AA 电池



For Canon 佳能: DCBP-1C

580EXII/ 580EX/ 550EX/ MR-14EX/ MT-24EX



For Nikon 尼康: DCBP-1N

SB-11/ SB-20/ SB-22/ SB-24/ SB-25/ SB-26/ SB-27/ SB-28/ SB-28DX/ SB-80DX/ SB800/ SB900



For Sony 索尼: DCBP-1S

HVL-F56AM



Battery pack can be place beneath the camera.

可将电池盒连接于相机底部

TTL Off Camera Cord

TC-U 通用TTL同步线

TC-U 是万用型通过镜头(TTL)离机线。它与大部份数码单反相机 (DSLR) 和闪光灯相容。用TC-U离机线您可以从一定距离连接照相机和闪光灯，在任何角度拍摄您都可以拍摄出美丽的、无影的照片。



Length 长度: 0.5m when folded 收缩时0.5m
3m when stretched 拉直时3m

The TC-U is a universal TTL off camera cord. It is compatible with most DSLR cameras and flashes. It allows you to attach your camera with your flash gun in a certain distance, thus you can beautiful shadowless lighting with flash from any angles you want.

Compatible Cameras 适配的相机
Canon 佳能 E-TTL, E-TTL II hotshoe cameras
Nikon 尼康 i-TTL hotshoe cameras
Pentax 宾得 P-TTL hotshoe cameras
Fujifilm 富士 Finpix SLR cameras
Samsung 三星 SLR cameras

Compatible Flashes 适配的机顶闪光灯
Nissin 日清 Di28, Di466, Di622
Canon 佳能 flashes corresponding to E-TTL, E-TTL II system
Nikon 尼康 flashes corresponding to i-TTL system
Pentax 宾得 flashes corresponding to P-TTL system
Fujifilm 富士 flashes corresponding to Finpix SLR cameras
Samsung 三星 flashes corresponding to Samsung SLR cameras
Sunpak 新霸 flashes corresponding to cameras listed above
Sigma 适马 flashes corresponding to cameras listed above
Metz 美兹 flashes corresponding to cameras listed above

OSC 专用TTL同步线

The TTL off camera cord allows you to attach your camera with your flash gun in a certain distance, and now you can have your flash coming from any angles you want for beautiful shadow-less lighting.



TTL Off-Camera Cord TTL同步线

Model 型号	Compatible Camera 适配的相机品牌
OSC-C1	Canon 佳能
OSC-N1	Nikon 尼康
OSC-OP1	Olympus/Panasonic 奥林巴斯/松下
OSC-SM1	Samsung/Pentax 三星/宾得

Length 长度:
300mm when folded
1800mm when stretched
收缩时0.3m
拉直时1.8m
Weight 重量: 95g

MACRO LED RING FLASH

L2R-100

微距环形闪光灯

The Macro LED Ring Flash allows you to take macro photography at ease. The heatless LED light provides brilliant illumination for accurate and efficient focusing of object with stable color temperature. It can perform up to 800 flashes with 4 AA Batteries. The evenly spread flashlight ascertains the object in close distances is illuminated from top to bottom. More importantly, since the flash is composed of two separate flash tubes, users can choose to either flash with both tubes or with only one of them in order to create explicit shadows on the vivid photos. The LED ring flash also allows easy control of exposure increment to suit your specific needs. With its light weight and handy design, The Macro LED Ring Flash is undoubtedly your best choice for macro photography.

微距环形LED闪光灯能使你轻松地进行各种微距摄影，其LED补光灯使您在昏暗环境下也能快速对焦。整枝灯使用4颗AA电池，能进行高达800次闪光。其环形设计使闪光能均匀地散布在微距拍摄目标的每一部份，而更重要的是微距环形LED闪光灯由两枝独立的闪光灯灯管组成，当只启动其中一枝灯管时能形成清楚的阴影，使照片具有雕刻效果。这产品设有微调闪光输出功能，使用者可以按需要设定闪光输出量。微距环形LED闪光灯轻巧方便，是微距摄影者的不二之选。



适配环尺寸 Adapter Size:
49/52/55/58/62/67mm(72/77mm需另购)

类型 Usage:	用于近距离摄影的机载补光灯 Macro Photography
闪光指数 Guide No:	14
闪光覆盖范围 Flash Coverage:	80°
闪光构造 Flash Unit Structure:	两组灯管同闪或A组B组单独闪 2 Units of Flash Tube
闪光比控制 Flash Control:	在1:8-1:1-8:1间以1/2档为增量调节 Increment of 1/2 in 1:8-1:1-8:1
闪光曝光补偿 Exposure Compensation:	手动, 闪光包围曝光: 以1/3档为增量调节 Manually, Flash Exposure: Adjustment of Increasing by 1/3
对焦辅助灯 Focus Assist Lamp:	覆盖范围: 上下约40° / 左右约45° Coverage : Vertical 40° / Horizontal 50°
色温 Color Temperature:	5500K
点亮时间 Ignition Time:	20s
回电时间 Recycle Time:	0.1-5s
电池规格 Battery Type:	4 x (AA/LR6) 碱性电池 4 x (AA/LR6) Alkaline Battery
电池寿命 Battery Life Span:	约100-800次闪光 100-800 Flashes
外部电源 External Battery:	可兼容佳能CP-E4电池组 Capatible With CP-E4 Battery Unit
控制单元: Control Unit Dimension:	135 x 71 x 61mm
发光单元 Flash Unit Dimension:	136 x 118 x 29mm
重量 Weight:	265g


LR-32LED

LED

环形闪光 / 恒光 两用灯

LR-32LED is a handy flash which also has LED continuous lighting function for macro photography. Operating the equipment is especially comfortable since it uses energy-saving and heatless LED bulbs. The LED bulbs have a long lifespan and stable color temperature. They can work up to four hours lighting. LR-32LED provides three different levels of exposure compensation - <AB> full lighting, <A> Group LED lighting, and Group LED Lighting.

LR-32LED 环形闪光/恒光两用灯可以让你在进行微距摄影时获得闪光和恒光两种效果。它采用了省电、不发热的LED灯泡，使用起来特别舒适。LED灯泡寿命长，色温稳定，可以提供补光达4小时。而且，LR-32LED有三种补光方式，包括AB两组LED同时补光、A组LED补光、B组LED补光，以达到不同的补光效果。

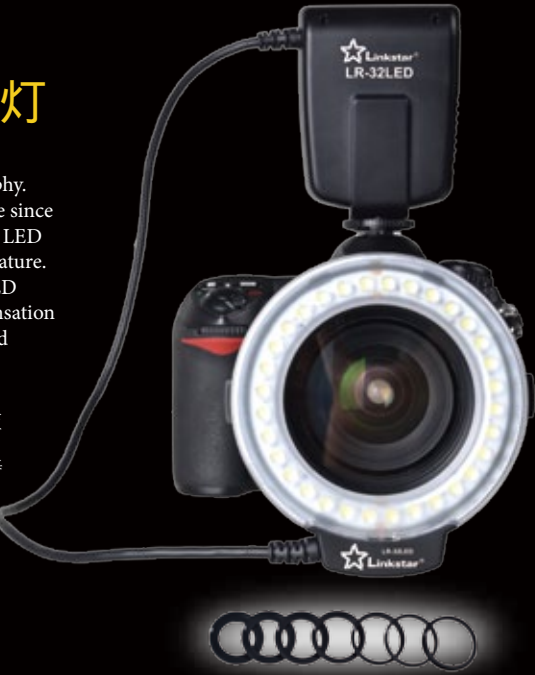

适配环尺寸 Adapter Size:
52/55/58/62/67/72/77mm

LED数量 No. of LED Bulbs:	32pcs
有效闪光范围 Effective flash scope:	5~100cm
色温 Colour temperature:	5500K
闪光持续时间 Exposure time:	1/100s
电源 Power supply:	4 x AA batteries
重量 Weight:	167.2g



可用于尼康 / 佳能相机

LED lighting LED 灯

LED Lighting

The VD Series LED lights are designed to provide high intensity light output while maintaining stability and reliability. They are light in weight and small in size therefore they are suitable for mounting on a camera. LED lights operate with a low temperature which results in relatively long life span. Statistical research shows that LED lights can last up to 35,000 to 50,000 hours of durability.

LED灯

VD系列LED灯是专门为追求高能量、稳定可靠的光输出而设计。由于体积纤小，重体轻，非常适合用于照像机上。LED灯在提供照明时所释放的热力非常低，并拥有相对其他照明工具效长的寿命。据统计，一个LED灯泡的寿命长达35,000至50,000小时照明。



VD-1



Power 功率	6W
Color Temp 色温	5500K - 6000K
Lithium Battery 锂电池	NP-F-550
Power Control 调光	Stepless 无极调光



VDK-2



VD-2



5 x AA 电池



VDK-2A



VD-2A

Model 型号	VD-2	VD-2A
No. of LED Bulbs 灯泡数量	120pcs	72pcs
Color Temp 色温	5500K - 6000K	
Power Supply 电源	5 x AA Battery	
Power Control 调光	Stepless 无极调光	



VD-3 + VLHG-30CL



VLH-20HS



6 x AAA 电池



VD-3



AC 100V-240V to DC 9V Power Adapter

Power 功率	7.2W
No. of LED Bulbs 灯泡数量	120pcs
Color Temp 色温	5500K - 6000K
Power Supply 电源	6 x AAA Battery/ AC to DC Power Adapter 6 x AAA 电池/ AC转DC电源适配器
Power Control 调光	Stepless 无极调光

Speedlight Softbox

相机闪光灯柔光箱

The SLB Series Speedlight Softbox is a lightweight tool that eliminates harsh shadows and distributes light evenly. It is perfect for any studio or portrait shootings. A multi bracket is included for further adjustment of position.

SLB系列闪光灯柔光箱能帮助摄影师消除清晰的阴影，并把光线平均的散佈在摄像对象，非常适合任何的影楼、人像摄影。SLB系列所提供的托架使安装更方便简单。




SLB-4545/6060



Mult-bracket

Max Height of Speedlight: 178mm
Hot shoe socket included



SLB-4565

Model 型号	Softbox size 尺寸
SLB-4545	45 x 45cm
SLB-6060	60 x 60cm
SLB-4565	45 x 65cm

Flash Gun Diffusor

相机闪光灯柔光罩

Flash Diffusers - D1/D2/D3/D4 were produced with the finest materials and computer-cut so they can perfectly fit with your flash guns.

D1/D2/D3/D4 一系列的闪光灯柔光罩都用了最好的物料製造而成，并使用电脑精确切割，一定能完美的套用在您的闪光灯上。



D1/D2/D3/D4/D9

圆形柔光罩



Model No. 型号	Compatible Flash 适配的相机闪光
D1 (60x38 mm)	Nikon SB600 Nikon SB800
D2 (60x36 mm)	Sony F32X Canon 430 FE DPT386AFZ
D3 (63x43 mm)	Sony F56AM Nikon SB/26/28
D4 (73x43 mm)	Canon 580EX Canon 550EX
D9 (68x48 mm)	Nikon SB900



DIFFUSOR CUP

方形柔光罩

Model 型号	Compatible Flash Gun 适配的相机闪光
FG-DN	SB-600(Nikon)
FG-DN1	SB-900(Nikon)
FG-DN2	SB-400 (Nikon)
FG-DC	580EXII(Canon)
FG-DC1	430EXII(Canon)
FG-DC2	270EX (Canon)
FG-DS	HVL-F58AM(Sony)

Lens Filter 滤镜

Our lens filters help you take photos with different effects and protect your precious lens.
我们的滤镜能让您在进行拍摄时达到不同的效果，并且保护您宝贵的镜头不致受损。



UV FILTER
紫外光滤镜



MC UV FILTER
多层镀膜紫外光滤镜

Model 型号	Filter- Ø
CLF-UV-49	49 mm
CLF-UV-52	52 mm
CLF-UV-55	55 mm
CLF-UV-58	58 mm
CLF-UV-62	62 mm
CLF-UV-67	67 mm
CLF-UV-72	72 mm
CLF-UV-77	77 mm
CLF-UV-82	82 mm

Model 型号	Filter- Ø
CLF-MCUV-49	49 mm
CLF-MCUV-52	52 mm
CLF-MCUV-55	55 mm
CLF-MCUV-58	58 mm
CLF-MCUV-62	62 mm
CLF-MCUV-67	67 mm
CLF-MCUV-72	72 mm
CLF-MCUV-77	77 mm
CLF-MCUV-82	82 mm



CPL FILTER
圆偏光镜

Model 型号	Filter- Ø
CLF-CPL-49	49 mm
CLF-CPL-52	52 mm
CLF-CPL-55	55 mm
CLF-CPL-58	58 mm
CLF-CPL-62	62 mm
CLF-CPL-67	67 mm
CLF-CPL-72	72 mm
CLF-CPL-77	77 mm
CLF-CPL-82	82 mm



STAR FILTER
星光滤镜

Model 型号	Filter- Ø
CLF-S-49	49 mm
CLF-S-52	52 mm
CLF-S-55	55 mm
CLF-S-58	58 mm
CLF-S-62	62 mm
CLF-S-67	67 mm
CLF-S-72	72 mm
CLF-S-77	77 mm
CLF-S-82	82 mm

Photo Sensor 热靴



HS-15
with 1/4" female



HS-25A3
with 1/4" female
SC-253 sync cords
2.5mm pin, length 30cm



HS-25SA
for Sony DSLR & Konica
Minolta



HS-25B
with hot
shoe contact



HS-25C
with 1/4" female
(带1/4" 连接)



HS-25D
with hot shoe
contact



PSL-25
Photo sensor with hot
shoe & 1/4" female



HS-25Sa2
hot shoe adapter for
Sony DSLR



PS-35
plug-in photo sensor



PSS-10
Photo sensor
with suction cap



PSL-15
Photo sensor with hot
shoe & 1/4" female

Accessories 相机 / 闪光灯支架



PBC



PBC-20D



PBC-29Z



PBC-200HHS



PBC-16T



PBC-L